


# DOREX MORTISE LOCKS

SECURITY HARDWARE

## DOREX HB2300 HOOKBOLT LOCK

HB23

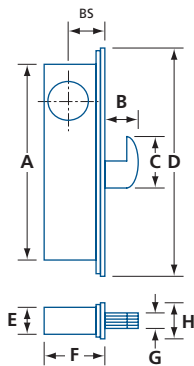

- Heavy zinc plated steel construction
- 5-ply laminated steel pivot bolt with 3 case-hardened center plies plus hardened roll pin (sawing test meets ANSI performance specifications)
- 1<sup>3</sup>/<sub>16</sub>" (20.5 mm) bolt throw
- Non-handed
- Cylinder backset: 3<sup>1</sup>/<sub>32</sub>" (24.6 mm) or 1<sup>1</sup>/<sub>8</sub>" (28.6 mm)
- Lock accepts standard 1<sup>5</sup>/<sub>32</sub>" (29.4 mm) diameter mortise cylinder with cam A (Adams Rite type)
- Flat anodized aluminum (#FP21) faceplate included
- Other faceplates available, see page 05.203

MODEL	FINISH	BS	A	B	C	D	E	F	G	H	/CASE
HB2302	AL, DU	3 <sup>1</sup> / <sub>32</sub> (24.6)	6 (152.7)	1 <sup>7</sup> / <sub>32</sub> (13.4)	1 <sup>1</sup> / <sub>4</sub> (31.8)	6 <sup>7</sup> / <sub>8</sub> (174.6)	2 <sup>9</sup> / <sub>32</sub> (22.9)	1 <sup>5</sup> / <sub>8</sub> (41.4)	5 <sup>8</sup> / <sub>8</sub> (15.3)	1 (25.4)	25
HB2303	AL, DU	1 <sup>1</sup> / <sub>8</sub> (28.6)	6 (152.7)	1 <sup>7</sup> / <sub>32</sub> (13.4)	1 <sup>1</sup> / <sub>4</sub> (31.8)	6 <sup>7</sup> / <sub>8</sub> (174.6)	2 <sup>9</sup> / <sub>32</sub> (22.9)	1 <sup>25</sup> / <sub>32</sub> (45.1)	5 <sup>8</sup> / <sub>8</sub> (15.3)	1 (25.4)	25

IN (MM)