



BHMA
CERTIFIED

G2

C UL US
LISTED

3H

ADA

1
YEAR

FH

FC

FS



- Type** • Cylindrical lock
- Certifications**
- Certified ANSI/BHMA A156.2, Series 4000, Grade 2
 - cULus listed, 3hr fire-rating
 - UL 10C Positive Pressure Rating
 - Meets ADA requirements
 - 1 Year limited warranty
- Door Thickness** • 1 $\frac{3}{8}$ – 1 $\frac{3}{4}$ " (35 – 44.5 mm)
- Handing** • Non handed
- Backset**
- 2 $\frac{3}{4}$ " (70 mm)
 - 2 $\frac{3}{8}$ " (60 mm) – available
 - 3 $\frac{3}{4}$ " (95 mm) – available
 - 5" (127 mm) – available
- Spring Latch** • Stainless steel, $\frac{1}{2}$ " (12.7 mm) throw
- Faceplate**
- Mortise type, square corners
 - 1 $\frac{1}{8}$ x 2 $\frac{1}{4}$ " (28.5 x 57 mm)
- Strike** • ASA Strike
- Trim**
- Solid, pressure cast lever
 - Brass rose
 - Rose diameter: 3 $\frac{5}{16}$ " (84.5 mm)

- Chassis**
- Concealed mounting plate and screws
 - Removable security posts
 - Lever clutch release – option

- Preparation**
- Cross bore: 2 $\frac{1}{8}$ " (54 mm)
 - Edge bore: 1" (25.4 mm)

- Cylinder**
- Solid brass, 6-pin
 - Schlage "C" keyway, 2 keys
 - Removable, rekeyable

Other keyways and keying options available, including CX5 high security

Functions	10 Passage	53 Entry*
	15 Exit	60 Store
	17 Dummy, single	70 Classroom
	42 Privacy	80 Storeroom*
	51 Office	82 Institution

() Lever clutch release available (-0)*

- Lever Styles** C–Curved return, H–Standard return, S–Straight; no return

- Finish** C26D–Satin chrome, C3–Polished brass

Other finishes available by special order

F	H	53	C26D	-O
SERIES	STYLE	FUNCTION	FINISH	OPTION ¹


(1) OPTIONS: 238 2-3/8IN (60MM) BACKSET -O LEVER CLUTCH RELEASE (53 & 80 ONLY)

SELECTION GUIDE

SERIES	STYLE	FUNCTION	FINISH ¹	/ CASE
F	C, H, S	10 Passage	C26D, C3	12
F	C, H, S	15 Exit	C26D	12
F	C, H, S	17 Dummy, single	C26D, C3	40
F	C, H, S	42 Privacy	C26D, C3	12
F	C, H, S	51 Office ↔	C26D	12
F	C, H, S	53 Entry ↔	C26D, C3	12
F	C, H	53-O Entry, with clutch release ↔	C26D	12
F	C, H, S	60 Store ↔	C26D	12
F	C, H, S	70 Classroom ↔	C26D, C3	12
F	C, H, S	80 Storeroom ↔	C26D, C3	12
F	C, H	80-O Storeroom, with clutch release ↔	C26D	12
F	C, H, S	82 Institution / utility ↔	C26D	12

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED

↔ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE (1) NOTE: IN-STOCK FS LEVERS ARE ONLY AVAILABLE IN C26D

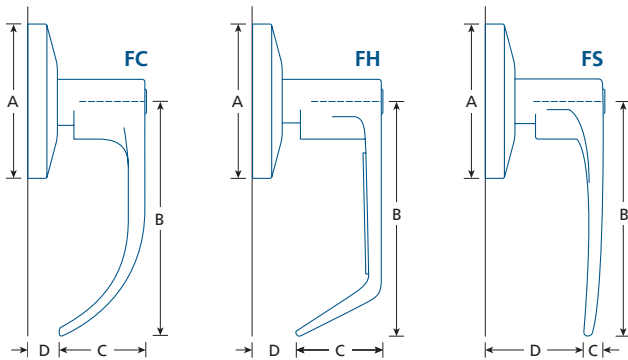

		A	B	C	D*
FC	Ⓛ	3 5/16 (84.5)	4 1/2 (114)	1 7/8 (48)	1/2 (12.7)
FH	Ⓛ	3 5/16 (84.5)	4 1/2 (114)	1 7/8 (48)	1/2 (12.7)
FS	Ⓛ	3 5/16 (84.5)	4 11/16 (119)	9/16 (14)	1 27/32 (46.8)

IN (MM) (*) DIMENSION MAY VARY DUE TO DOOR THICKNESS.

PARTS & ACCESSORIES



9106

T-Strike, square corners:
1 1/8 x 2 3/4" (28.5 x 70 mm)

9106NH

T-Strike, no hole; square corners:
1 1/8 x 2 3/4" (28.5 x 70 mm)



ASA-T

ASA strike with adjustable tab

ASANH

ASA strike, no hole



TL013

Backset extension to 3 3/4" (95 mm);
Use with 2 3/8" (60 mm) backset latch

TL014

Backset extension to 5" (127 mm);
Use with 2 3/4" (70 mm) backset latch



FH001

Passage latch: 2 3/8" (60 mm) backset,
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate

FH003

Passage latch: 2 3/4" (70 mm) backset,
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate

FH010

Privacy latch: 2 3/8" (60 mm) backset,
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate

FH002

Privacy latch: 2 3/4" (70 mm) backset,
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate



FH005

Deadlatch: 2 3/8" (60 mm) backset,
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate

FH004

Deadlatch: 2 3/4" (70 mm) backset,
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate

