



TLA 42I
Privacy with indicator



- Certifications**
- Conforms to ANSI/BHMA A156.5, Grade 2
 - cULus listed, 3hr fire-rating*
 - 1 Year limited warranty

(*) Except privacy model 42I

- Door Thickness**
- 1 $\frac{3}{8}$ –1 $\frac{3}{4}$ " (35–44.5 mm)
 - SFIC Model: 1 $\frac{1}{16}$ –2" (40–51 mm)
 - Kit for 2 $\frac{1}{4}$ " (57 mm) – available

- Handing**
- Non handed

- Backset**
- 2 $\frac{3}{4}$ " (70 mm)
 - 2 $\frac{5}{8}$ " (60 mm) – available
 - 2 $\frac{3}{8}$ –2 $\frac{3}{4}$ " (60–70 mm) adjustable – available
 - 5" (127 mm) – available

- Deadbolt**
- Solid brass with hardened steel security pin
 - 1" (25.4 mm) throw

- Faceplate**
- Mortise type, square corners
 - 1 $\frac{1}{8}$ x2 $\frac{1}{4}$ " (29x57 mm)

- Strike**
- 2-piece security strike (wood/metal frame)
 - 1 $\frac{1}{8}$ x2 $\frac{3}{4}$ " (29x70 mm), square corners
 - Plastic dust-box

Other strikes available

- Chassis**
- Free-spinning cylinder collar
 - Steel cylinder housing
 - Exposed mounting screws

- Preparation**
- Cross bore: 1 $\frac{1}{2}$ " or 2 $\frac{1}{8}$ " (38 mm or 54 mm)*
 - Edge bore: 1" (25.4 mm)

(*) 1 $\frac{1}{2}$ " (38 mm) installation will negate Grade 2 conformity, but will retain fire-rating.

- Cylinder**
- Solid brass, 6-pin
 - Schlage "C" keyway, 2 keys
 - Removable, rekeyable
 - Small format interchangeable core (SFIC) model – available

Other keyways and keying options available, including CX5 high security.

- Functions**
- 42I Privacy with indicator
 - 51 Single cylinder, thumb-turn
 - 57 Thumb-turn only, exterior plate
 - 60 Double cylinder
 - 70 Single cylinder, thumb-turn (Classroom)

- Finish**
- C19–Matte black, C26D–Satin chrome, C3–Polished brass, C32D–Satin stainless steel

Other finishes available by special order

| TLA | 51 | C32D | -U |
|--------|----------|--------|-----------------------|
| SERIES | FUNCTION | FINISH | OPTION ⁽¹⁾ |


(1) OPTIONS: 238–2 3/8IN (60MM) BACKSET -U–ADJUSTABLE BACKSET

SELECTION GUIDE

| SERIES | FUNCTION | FINISH ¹ | /CASE |
|--------|---|---------------------|-------|
| TLA | 42I Privacy, with indicator* | 26D, 32D | 20 |
| TLA | 51 Single cylinder with thumb-turn ➡ | C19, C26D, C3, C32D | 20 |
| TLA | 51-U Single cylinder with thumb-turn, adjustable backset option ➡ | C26D, C32D | 20 |
| TLA | 51IC Single cylinder with thumb-turn (BEST® F, 7-pin SFIC included) ➡ | C26D, C32D | 20 |
| TLA | 57 Thumb-turn only with blank exterior plate | C26D | 20 |
| TLA | 60 Double cylinder ➡ | C3, C32D | 20 |
| TLA | 60-U Double cylinder, adjustable backset option ➡ | C32D | 20 |
| TLA | 70 Single cylinder, with thumb-turn (Classroom) ➡ | C32D | 20 |

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED

➡ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE (*) CANNOT ACCOMMODATE DOORS THICKER THAN 1-3/4IN (44.5 MM); NOT FIRE-RATED

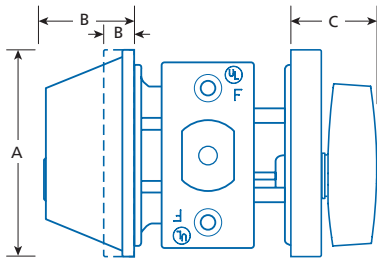

| | ø A | B | C |
|---------|----------------|-----------------|-----------|
| TLA | 2 9/16 (65) | 1 1/8 (29) | 1 (25) |
| TLA 42I | 2 9/16 (65) | 1 1/32 (8.5) | 1 (25) |
| TLA 57 | 2 9/16 (65) | 1 1/32 (8.5) | 1 (25) |

IN (MM)

PARTS & ACCESSORIES



9111

Steel frame strike; square.
1 1/8 x 2 3/4" (29 x 70 mm)



9118

Wood frame strike; square.
1 1/8 x 2 3/4" (29 x 70 mm)

9118R

Wood frame strike; round.
1 1/8 x 2 3/4" (29 x 70 mm)



9806

CX5 high security SFIC core, 6 pin, 0 bitted

9807

CX5 high security SFIC core, 7 pin, 0 bitted

CX5-TPIC

Tailpiece for use with CX5 SFIC cores

CBI-BF6KD-26D

BEST® F type SFIC core, 6 pin, keyed different

CBI-BF7KD-26D

BEST® F type SFIC core, 7 pin, keyed different



TL007

Deadbolt: 2 3/8" (60 mm) backset,
1 x 2 1/4" (25.4 x 57 mm) faceplate

TL008

Deadbolt: 2 3/4" (70 mm) backset,
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate

TL009

Deadbolt: 5" (127 mm) backset,
1 x 2 1/4" (25.4 x 57 mm) faceplate
(not fire-rated)

TLA-LBU

Deadbolt: 2 3/8-2 3/4" (60-70 mm) adjustable
backset, 1 x 2 1/4" (25.4 x 57 mm) faceplate



TL020

Plastic spacer for latches with
1 x 2 1/4" (25.4 x 57 mm) faceplate



TLA85052

Longer spindle and screw kit for 2 1/4" (57 mm)
thick door. Cannot be used with TLA 42I
Indicator model.

