



- Certifications**
- Conforms to ANSI/BHMA A156.5, Grade 1
 - cULus listed, 3hr fire-rating
 - 5 Year limited warranty

- Door Thickness**
- 1 $\frac{1}{8}$ "–2" (40–51 mm)
 - Kit for 2 $\frac{1}{4}$ " (57 mm) – available

- Handing**
- Non handed

- Backset**
- 2 $\frac{3}{4}$ " (70 mm)
 - 2 $\frac{3}{8}$ " (60 mm) – available
 - 5" (127 mm) – available

- Deadbolt**
- Solid brass with hardened steel security pin
 - 1" (25.4 mm) throw

- Faceplate**
- Mortise type, square corners
 - 1 $\frac{1}{8}$ "x2 $\frac{1}{4}$ " (29x57 mm)

- Strikes**
- Wood & steel frame strikes; square corners
 - 1 $\frac{1}{8}$ "x2 $\frac{3}{4}$ " (29x70 mm)
 - Plastic dust-box

Other strikes available

- Chassis**
- Free-spinning cylinder collar
 - Steel cylinder housing
 - Concealed mounting screws

- Preparation**
- Cross bore: 2 $\frac{1}{8}$ " (54 mm)
 - Edge bore: 1" (25.4 mm)

- Cylinder**
- Solid brass, 6-pin
 - Schlage "C" keyway, 2 keys
 - Removable, rekeyable
 - Small format interchangeable core (SFIC) model – available*

Other keyways and keying options available, including CX5 high security. () BEST® and CX5® cores sold separately.*

- Functions**
- 51 Single cylinder, thumb-turn
 - 60 Double cylinder
 - 70 Single cylinder, thumb-turn (Classroom)

Less Core (LC) available – see selection guide

- Finish**
- C15–Satin nickel, C15A–Antique nickel,
 - C26D–Satin chrome, C3–Polished brass,
 - V3–Polished brass (Endurance)

Other finishes available by special order

GX1A	51	C26D	LC
SERIES	FUNCTION	FINISH	OPTION ¹


(1) OPTIONS: 238-2 3/8IN (60MM) BACKSET LC-LESS CORE (51 ONLY) WEI-WEISER KEYWAY

SELECTION GUIDE

SERIES	FUNCTION	FINISH ¹	/CASE
GX1A	51 Single cylinder, thumb-turn ➡	C15, C15A, C26D, C3, C5, V3	12
GX1A	51 LC Single cylinder, thumb-turn, less core ➡	C26D	12
GX1A	51 WEI Single cylinder, thumb-turn, 5-pin Weiser keyway ➡	C26D, C3, C5	12
GX1A	51 IC Single cylinder SFIC, thumb-turn, 7-pin BEST® F core included ➡	C15, C26D	12
GX1A	60 Double cylinder ➡	C26D	12
GX1A	60 IC Double cylinder SFIC, 7-pin BEST® F core included ➡	C26D	12
GX1A	70 Single cylinder, thumb-turn (Classroom) ➡	C26D	12
GX1A	70 IC Single cylinder SFIC, thumb-turn, 7-pin BEST® F core included (Classroom) ➡	C26D	12

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED

➡ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE

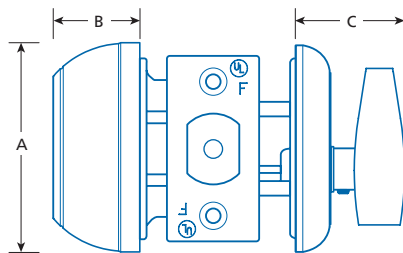

	A	B	C
GX1A	2 ¹⁵ / ₃₂ (63)	1 ¹ / ₁₆ (27)	1 ⁹ / ₃₂ (32.3)

IN (MM)

PARTS & ACCESSORIES



9111

Steel frame strike; square.
1¹/₈ x 2³/₄" (29 x 70 mm)



LM9111

Steel frame security strike; square.
1¹/₈ x 2³/₄" (29 x 70 mm)



9118

Wood frame strike; square.
1¹/₈ x 2³/₄" (29 x 70 mm)

9118R

Wood frame strike; round.
1¹/₈ x 2³/₄" (29 x 70 mm)



9806

CX5 high security SFIC core, 6 pin, 0 bitted

9807

CX5 high security SFIC core, 7 pin, 0 bitted

CX5-TPIC

Tailpiece for use with CX5 SFIC cores

CBI-BF6KD-26D

BEST® F type SFIC core, 6 pin, 0 bitted

CBI-BF7KD-26D

BEST® F type SFIC core, 7 pin, 0 bitted



TL007

Deadbolt: 2³/₈" (60 mm) backset,
1 x 2¹/₄" (25.4 x 57 mm) faceplate

TL008

Deadbolt: 2³/₄" (70 mm) backset,
1¹/₈ x 2¹/₄" (28.5 x 57 mm) faceplate

TL009

Deadbolt: 5" (127 mm) backset,
1 x 2¹/₄" (25.4 x 57 mm) faceplate
(not fire-rated)



TLA85052

Longer spindle and screw kit for
2¹/₄" (57 mm) thick door.

