




- Type** • Cylindrical lock
- Certifications** • Conforms to ANSI/NHMA A156.2, Series 4000, Grade 1
 • cULus listed, 3hr fire-rating
 • UL 10C Positive Pressure Rating
 • Meets ADA requirements
 • 5 Year limited warranty
- Door Thickness** • $1\frac{3}{8}$ –2" (35–51mm)
 • SFIC Models: $1\frac{9}{16}$ –2" (40–51mm)
- Handing** • Non handed
- Backset** • $2\frac{3}{4}$ " (70 mm)
 • $2\frac{3}{8}$ " (60 mm) – available
 • $3\frac{3}{4}$ " (95 mm) – available
 • 5" (127 mm) – available
- Spring Latch** • Stainless steel, $\frac{1}{2}$ " (12.7 mm) throw
 • Deadlatch, $\frac{3}{4}$ " (19 mm) throw – available
- Faceplate** • Mortise type, square corners
 • $1\frac{1}{8} \times 2\frac{1}{4}$ " (28.5 x 57 mm)
- Strike** • ASA Strike
- Trim** • Solid, pressure cast lever
 • Brass rose
 • Rose diameter: $3\frac{9}{16}$ " (90 mm)
- Chassis** • Concealed mounting plate and screws
 • Fixed security posts
 • Lever clutch release
- Preparation** • Cross bore: $2\frac{1}{8}$ " (54 mm)
 • Edge bore: 1" (25.4 mm)
- Cylinder** • Solid brass, 6-pin
 • Schlage "C" keyway, 2 keys
 • Removable, rekeyable
 • Small format interchangeable core (SFIC) model – available*
- Other keyways and keying options available, including CX5 high security. (*) BEST® and CX5® cores sold separately.*
- | | | |
|------------------|------------------|-----------------------|
| Functions | 10 Passage | 60 Store |
| | 15 Exit | 70 Classroom |
| | 17 Dummy, single | 75 Classroom security |
| | 42 Privacy | 80 Storeroom |
| | 53 Entry | 82 Institution |
- Lever Styles** C–Curved return, L–Standard return, S–Straight; no return
- Finish** C19–Matte black, C26D–Satin chrome
Other finishes available by special order

GX1	L	53	C26D
SERIES	STYLE	FUNCTION	FINISH

SELECTION GUIDE

SERIES	STYLE	FUNCTION	FINISH ¹	/CASE
GX1	C, L, S	10 Passage	C26D, C19 ²	6
GX1	L	15 Exit	C26D	6
GX1	L	17 Dummy, single	C26D, C19 ²	6
GX1	C, L, S	42 Privacy	C26D, C19 ²	6
GX1	C, L, S	53 Entry	C26D, C19 ²	6
GX1	C, L, S	53IC Entry SFIC* ➡	C26D, C19 ²	6
GX1	L	60IC Store SFIC* ➡	C26D	6
GX1	C, L, S	70 Classroom	C26D, C19 ²	6
GX1	C, L, S	70IC Classroom SFIC* ➡	C26D, C19 ²	6
GX1	L	75 Classroom security	C26D	6
GX1	L	75IC Classroom security SFIC* ➡	C26D	6
GX1	C, L, S	80 Storeroom	C26D, C19 ²	6
GX1	C, L, S	80IC Storeroom SFIC* ➡	C26D, C19 ²	6
GX1	L	82 Institution	C26D	6

(1) OTHER FINISHES AND FUNCTIONS AVAILABLE, MINIMUM ORDER QUANTITIES AND/OR ADDITIONAL DELIVERY TIMES MAY BE REQUIRED. (2) GX1L ONLY (*) ALL SFIC MODELS ARE LESS CORE
➡ KEYED FUNCTION; FULL KEYING SERVICES AVAILABLE.

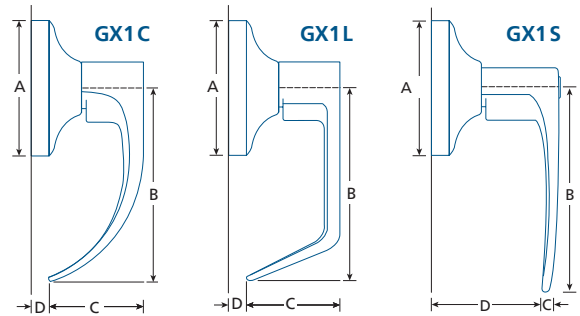

		A	B	C	D*
GX1C		3 9/16 (90)	5 (127)	2 1/2 (63.3)	3/8 (10)
GX1L		3 9/16 (90)	5 (127)	2 5/8 (66.7)	3/8 (10)
GX1S		3 9/16 (90)	5 (127)	7/8 (22)	2 7/16 (62)

IN (MM)

(*) DIMENSION MAY VARY DUE TO DOOR THICKNESS.

PARTS & ACCESSORIES



9106

T-Strike, square corners:
1 1/8 x 2 3/4" (28.5 x 70 mm)

9106NH

T-Strike, no hole; square corners:
1 1/8 x 2 3/4" (28.5 x 70 mm)



ASA-T

ASA strike with adjustable tab

ASANH

ASA strike, no hole



9806

CX5 high security SFIC core, 6 pin, 0 bitted

9807

CX5 high security SFIC core, 7 pin, 0 bitted

CBI-BF6KD-26D

BEST® F type SFIC core, 6 pin, keyed different

CBI-BF7KD-26D

BEST® F type SFIC core, 7 pin, keyed different



GX1SL238

Passage latch: 2 3/8" (60 mm) backset
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate

GX1SL234

Passage latch: 2 3/4" (70 mm) backset
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate

GX1PL238

Privacy latch: 2 3/8" (60 mm) backset
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate

GX1PL234

Privacy latch: 2 3/4" (70 mm) backset
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate



GX1DL238

Deadlatch: 2 3/8" (60) backset
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate

GX1DL234

Deadlatch: 2 3/4" (70 mm) backset
1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate



GX1DL234-34

Deadlatch: 2 3/4" (70 mm) backset,
3/4" (19 mm) throw, 1 1/8 x 2 1/4" (28.5 x 57 mm) faceplate



GX1LE334

Backset extension to 3 3/4" (95 mm); use with
2 3/8" (60 mm) backset latch

GX1LE500

Backset extension to 5" (127 mm); use with
2 3/4" (70 mm) backset latch

