

DDL 1150 SERIES

DIGITAL LOCKSET



Certifications • 1 Year limited warranty

Door Thickness • $1\frac{3}{8}$ –2" (35–51 mm)

Handing • Handed

Backset • $2\frac{3}{4}$ " (70 mm)
• $2\frac{5}{8}$ " (60 mm) – available

Latch • Stainless steel deadlatch
• $\frac{1}{2}$ " (12.7 mm) throw

Faceplate • Mortise type, square corners
• $1\frac{1}{8}$ x $2\frac{1}{4}$ " (29x57 mm)

Strike • $1\frac{1}{8}$ x $2\frac{3}{4}$ " (29x70 mm)
• Plastic dust-box

Chassis • Zinc alloy case with rubber seal
• Stainless steel mechanical push buttons
• Exposed mounting screws

Preparation • Cross bore: $2\frac{1}{8}$ " (54 mm)
• Edge bore: 1" (25.4 mm)

Cylinder —

Function Exterior lever always locked unless unlocked by entering correct combination or by inside lever.

Lever Style Lever with curved return


Finish SC–Satin chrome
Other finishes available by special order

Notes • Recommended for indoor use only
• Completely mechanical, no batteries required
• Easy combination changes

1150	SC	–	LH
SERIES	FINISH		HAND ⁽¹⁾

(1) LH– LEFT HAND; RH– RIGHT HAND

DIMENSIONS

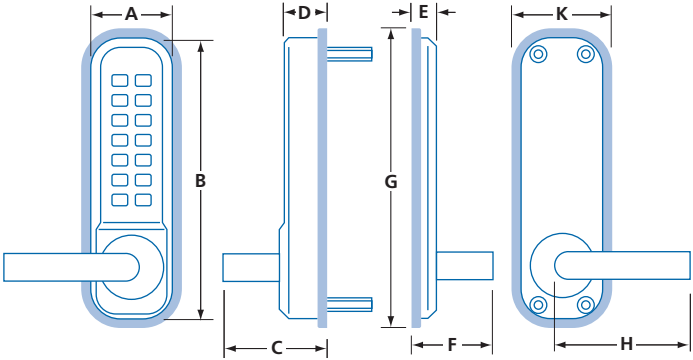

	A	B	C	D	E	F	G	H	K
1150	2⅛ (54)	7⅝ (185)	2½ (64)	1⅝ (33)	1⅜ (20)	2¼ (57)	1¾ (44)	1⅛ (27)	2⅞ (62)

IN (MM)

PARTS & ACCESSORIES



DLSC238
Deadlatch bolt, 2⅜" (60mm) backset,
1⅝x2¼" (29x57 mm) faceplate

DLSC234
Deadlatch bolt, 2¾" (70mm) backset,
1⅝x2¼" (29x57 mm) faceplate

